


unit:
mm







Industrial Hardware
Multi Redundant System

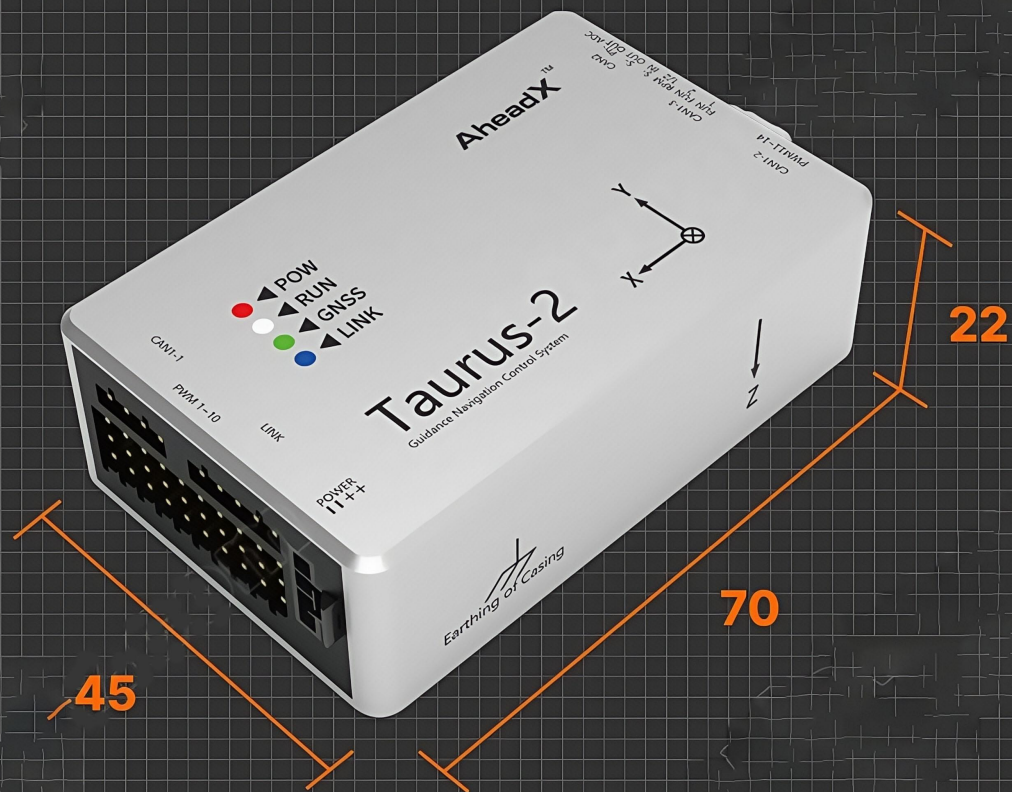

Weight:100g
Palm Size Only



Working Temperature
-20~75°C




Internal Damping
Structure



Galaxy
Cloud Management



One Station Controls
Multiple Platform Drones

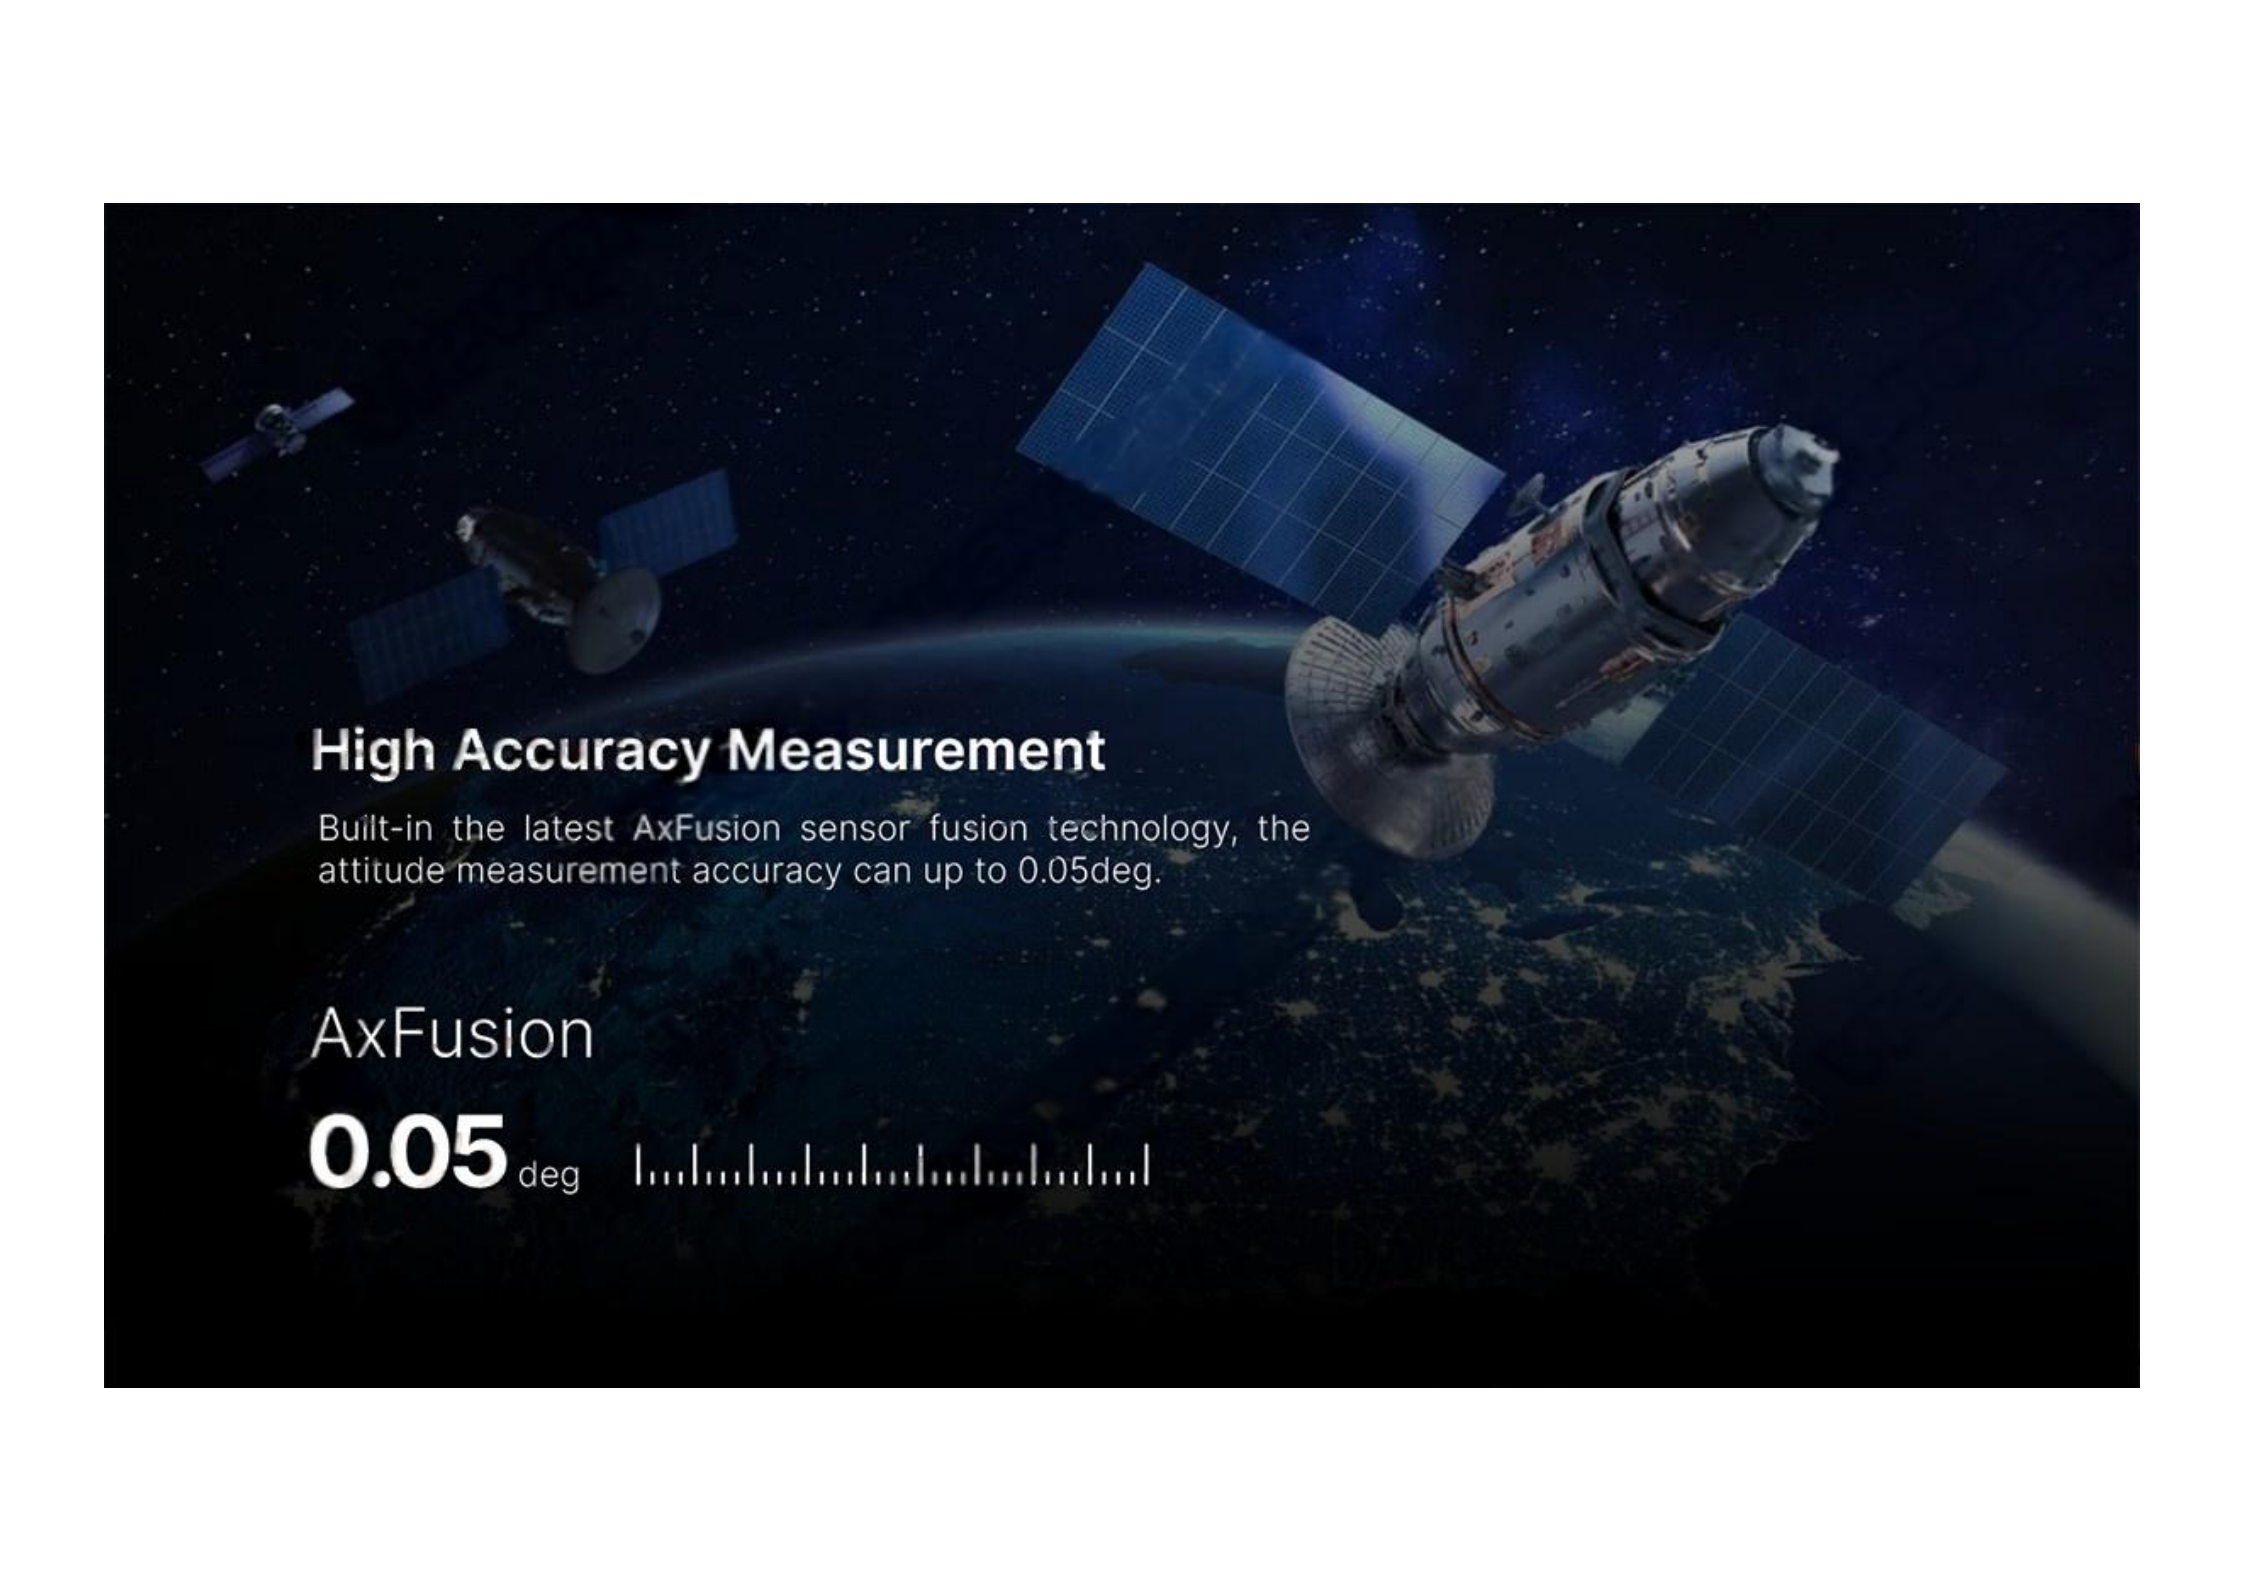The background of the slide is a dark space scene with a view of Earth's horizon. Several satellites are visible: a large one in the foreground with large solar panels and a dish antenna, and two smaller ones further away in the upper left.

High Accuracy Measurement

Built-in the latest AxFusion sensor fusion technology, the attitude measurement accuracy can up to 0.05deg.

AxFusion

0.05_{deg} 

4 REDUNDANCY IMU

Powerful Multi-Redundant System

Designed with 4 redundancy IMU make Taurus 2 have a more powerful inner "core", the IMU data source can be seamlessly switched quickly to ensure the aircraft flight safety.




4 REDUNDANCY IMU



15 PWM output channels Direct drive external mission equipment

3 expansion serial ports Easy to develop and integrate

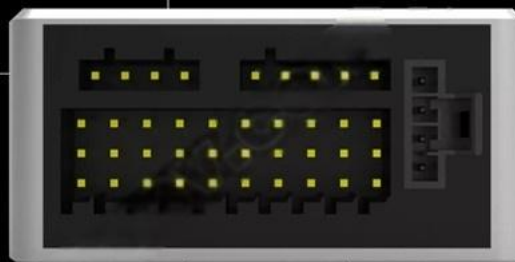

10 routes with 1000 waypoints each Meet the needs of large-scale aerial survey

4 CAN bus Avionics Module Arbitrarily Expanded



17000 POS Data



Rich Interfaces


4 Serial ports

15 PWM output

4 CAN bus

Excellent Anti-interference

Aluminum alloy shield housing, with excellent anti-interference

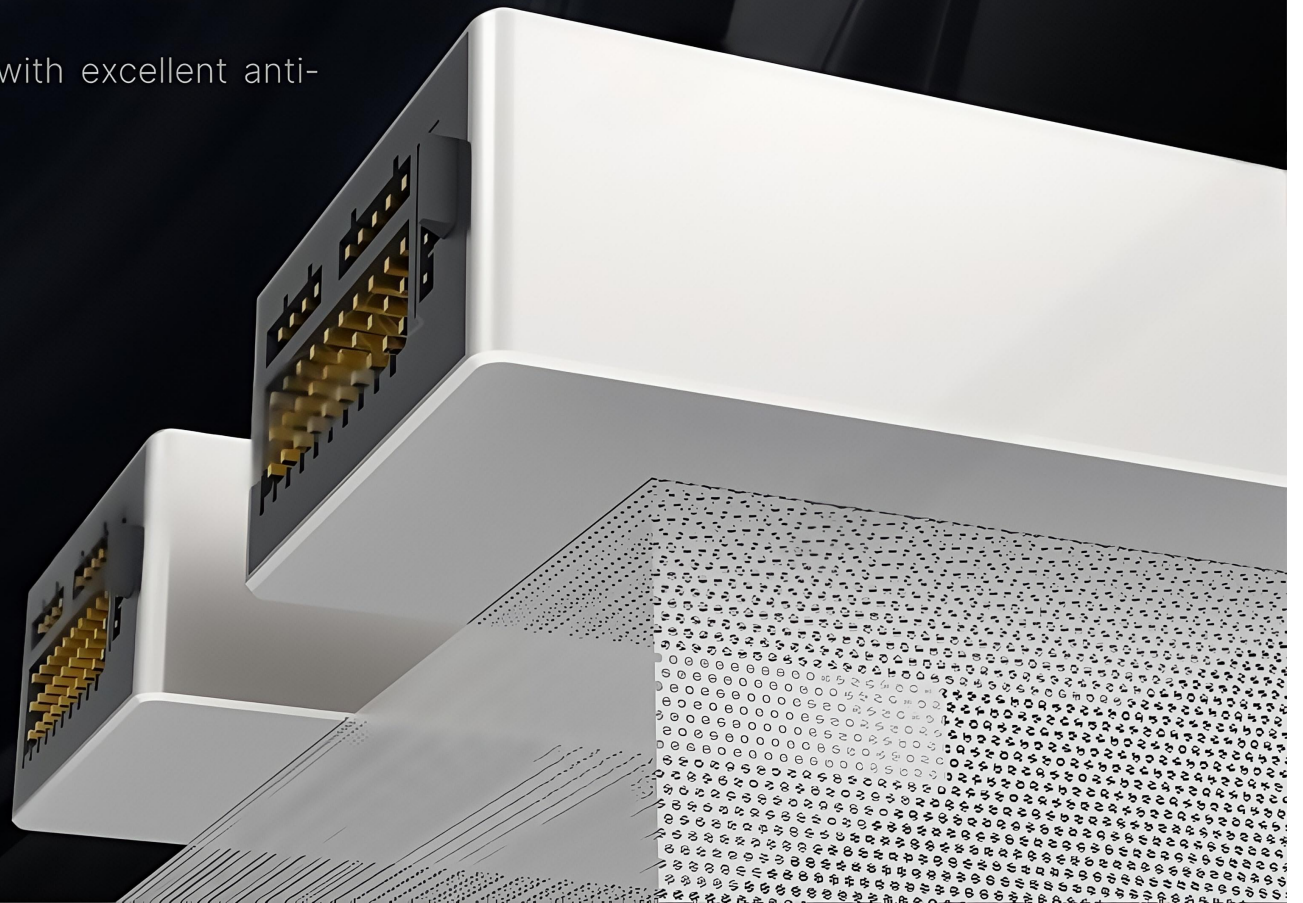

Simple QGC Master Easy APP




Graphical interaction interfaces



Multiple aircraft in one station control



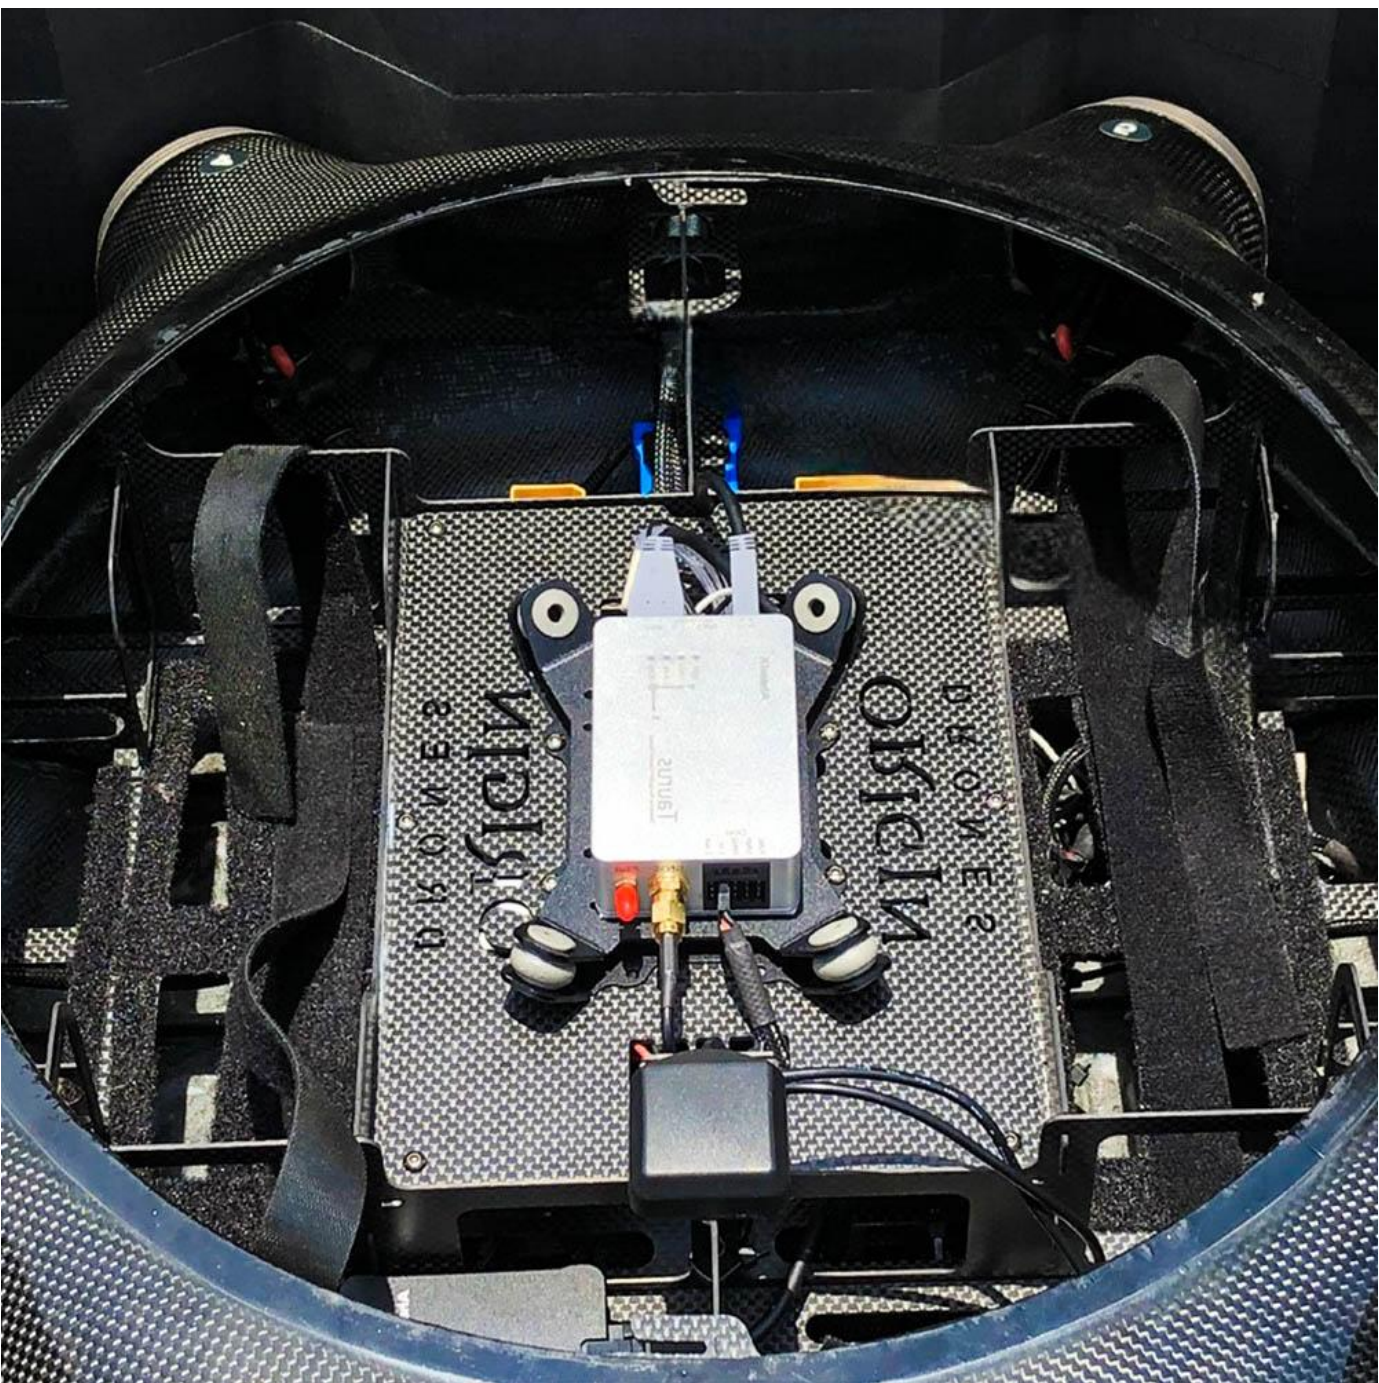



CONTACT CHINA MONEYPRO GROUP NOW:

EMAIL: SALES@MONEYPROUAV.COM

MOBILE: +86-18126437260 (WHAT'S UP) MS. AMY LUO