


4K



2.8mm FPV camera 1920*1080

Equiped with 2.8mm FPV lens to inspect in wide angle at same time.

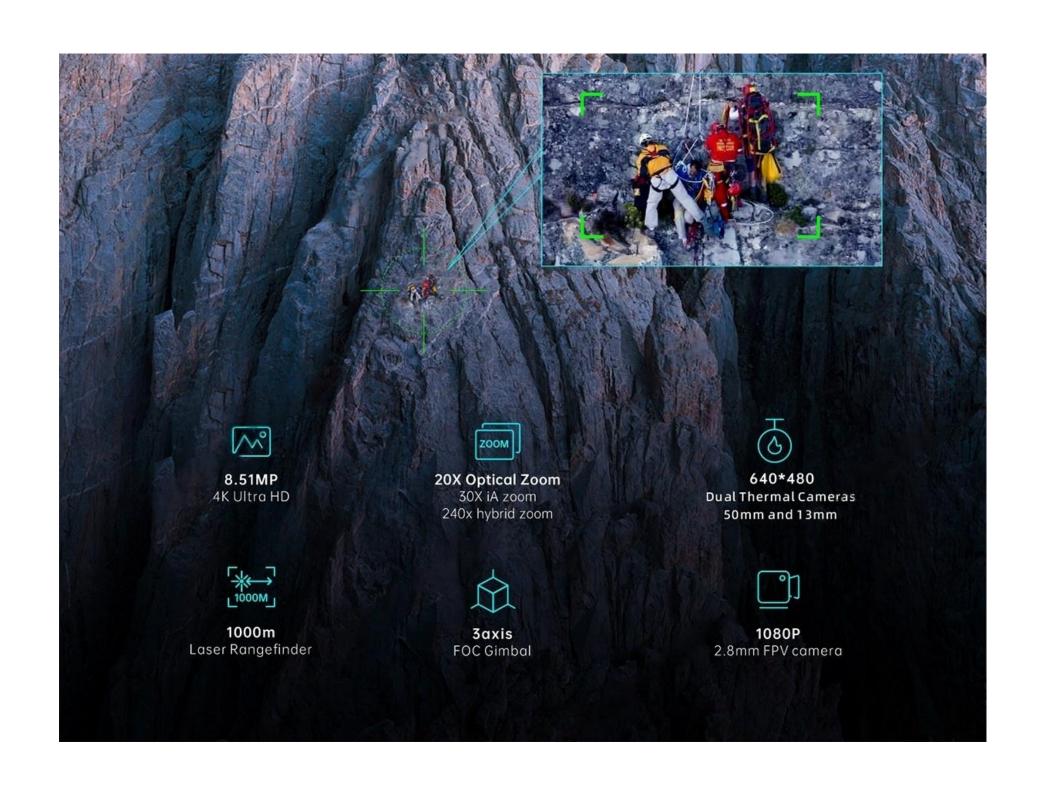



640*480

Dual Thermal Cameras

H30N has dual IR Thermal imager with 640*480pixel, one is 13mm to achieve the surveillance in wide angle and another one is 50mm to filful inspection in detail.

13 mm

50 mm





Standard Version









Pelican Case




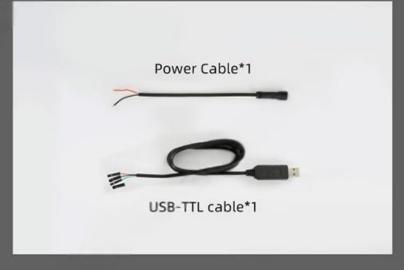

FOV angle display

Support "Point camera here" ,3D map with buid-in accurate Lat, Lon, Alt Support camera FOV display on the map

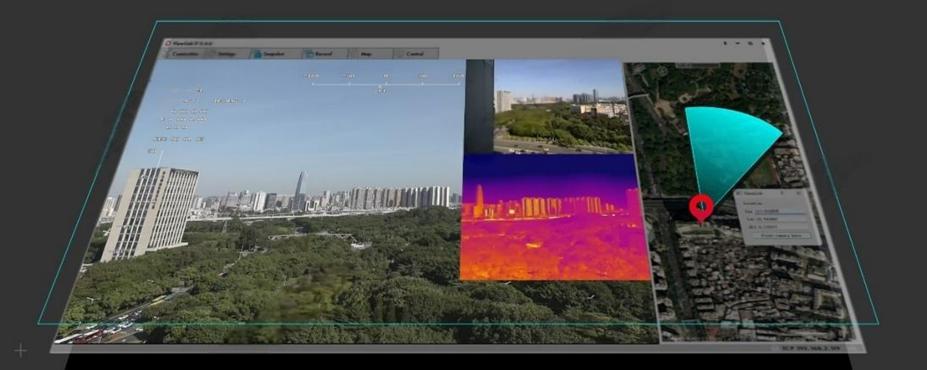

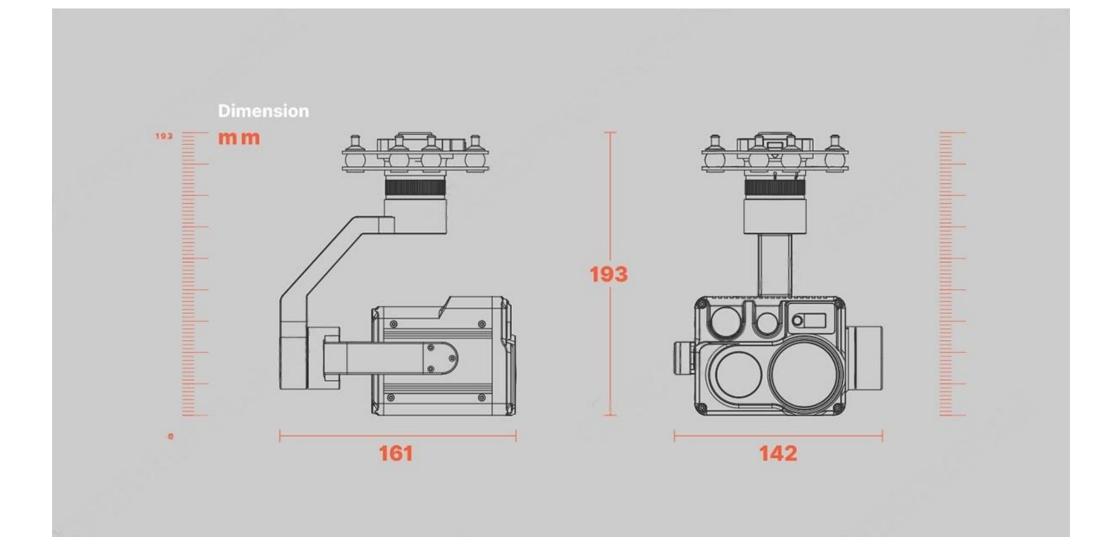


Quick release connector

Supports Ethernet output and controlling. Output options: Ethernet/IP (RTSF RTMP, UDP), FHD HDMI and SDI If you choose Ethernet only option, the gimbal will support 360 degrees continuous yaw. Control methods are also optional between: TCP, UDP, UART, ONVIF, PWM and SBUS. Supports max 128G micro-SD card record

metasy to assemble

Plug-and-Play

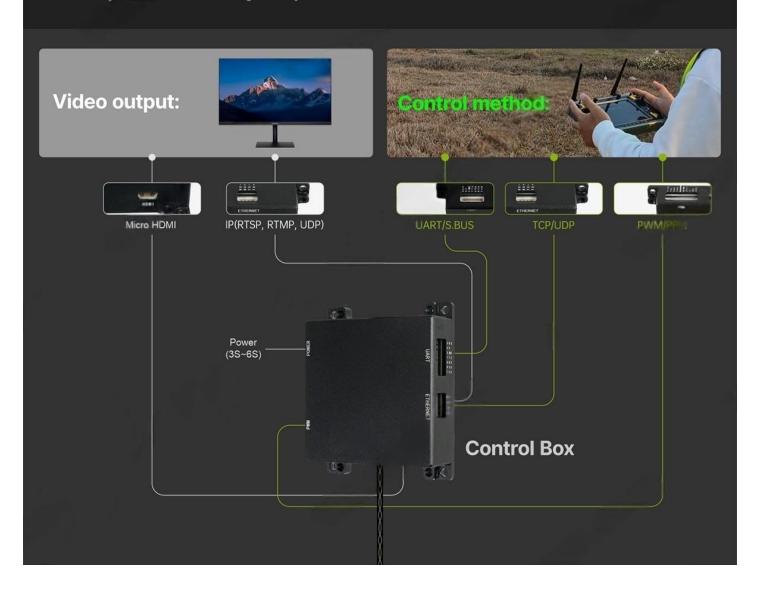

MULTI-SENSOR EO/IR LASER RANGEFINDER WITH DUAL IR THERMAL AND DUAL EO CAMERA

H30N

4K Ultra HD 8.51mg 640*480 Dual Thermal Cameras

THE UNSEE

Laser Rangefinder

1000 m

Max Range

with 1000m laser rangefinder, on the OSD menu, it will show the distance data and GPS coordinate of target with GPS data input from autopilot



CONTACT CHINA MONEYPRO GROUP NOW:

EMAIL: SALES@MONEYPROUAV. COM

MOBILE: +86-18126437260 (WHAT'S UP) MS. AMY LUO