

# MONEYPRO UP8 600W

AC 2X200W / DC 2X300W Two Channels Smart Balance Charger



AC/DC input



Wireless charging



Servo/Motor testing



200W  
External discharging



Power distribution



Multiple protection



Multiple language


# Widely AC Input 100-240V

Built-in multiple international languages, no national boundaries.



3.5 " LCD display, four working modes, simply control by one shuttle key

Two independent shuttle keys, independent working, one-to-one control, no need to switch

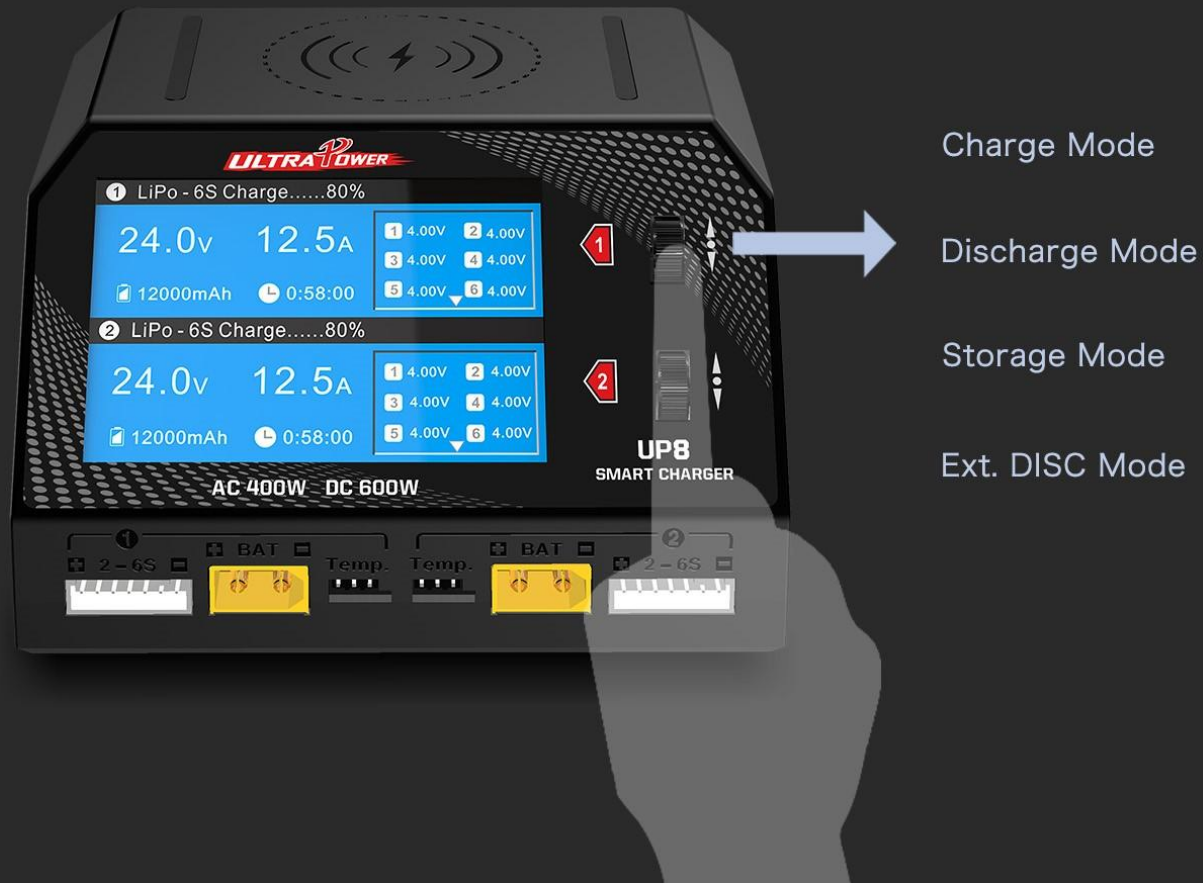

Independent mobile phone wireless charging function, built-in charging sensor chip

UP8 can realize 10W wireless charging for mobile phone, charge immediately, conveniently and efficiently.



Support to charge

iPhone 12, iPhone 13, iPhone 13 Pro max,  
Samsung Galaxy Note20 Ultra 5G,  
Samsung Galaxy S21 Ultra 5G,  
Samsung Galaxy Z Fold3 5G ,  
Huawei Mate 40 RS, Huawei mate 40 Pro,  
Huawei mate40 pro+5G,  
Xiaomi11, Xiaomi11 Ultra Pro, etc..



# Dual channel output, single channel current up to 16.0A

Independent dual channel output, without interference by each other, support to charge 2pcs different type batteries simultaneously, including LiPo, LiHV, Lilon, LiFe, NiMh, NiCd, Lead Acid.



# Enjoy a fast 200W discharging --- External discharging function

Connect the UP-D200 external discharger to the UP8 charger to discharge Lithium battery at Max.200W 15A, help you fast discharging.



## Motor/Servo testing function

Motor testing: Adjust the pulse width value of the ESC control signal, in order to adjust the motor's RPM value.  
According to RPM value and KV value to detect if the motor works well.





---

Servo testing: By adjusting and changing the pulse width, it can be detected if the servo's direction and angle are normal.





## Specification



Input Voltage:	AC 100-240 V, DC 9.0-30.0 V
Output Voltage:	0.1-30.0 V
Charging Current:	0.1-16.0 A x 2
Discharge Current:	CH1: 0.1-3.0 A / 0.1-15.0 A (External discharge mode) CH2: 0.1-3.0 A
Charge Power:	DC Input: 2x300W AC Input: Max.400W(CH1+CH2=400W) Support power distribution
Wireless Charge Power:	Max.10W
Discharge Power:	CH1: 8W/200W(External discharge mode) CH2: 8W
Balance Current:	Max.1000 mA/cell
Support Battery Types:	LiPo/LiHV/LiFe/Lilon(1-6S) NiMH/NiCd(1-16S) Lead Acid 2V-24V(1-12S)
LCD Screen type:	3.5 " 480x320 LCD
Dimensions:	125x119x76 mm
Weight:	780 g

---

**CONTACT CHINA MONEYPRO GROUP NOW:**

**EMAIL: [SALES@MONEYPROUAV.COM](mailto:SALES@MONEYPROUAV.COM)**

**MOBILE: +86-18126437260 (WHAT'S UP) MS. AMY LUO**