

Sensor redundancy State

ICM
20689

ICM
20649

BM1
088






480MHZ


MS
5611


RM
3100

Air speed
Fk


Fly mode
Stabilize

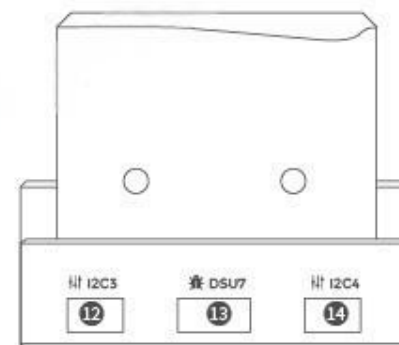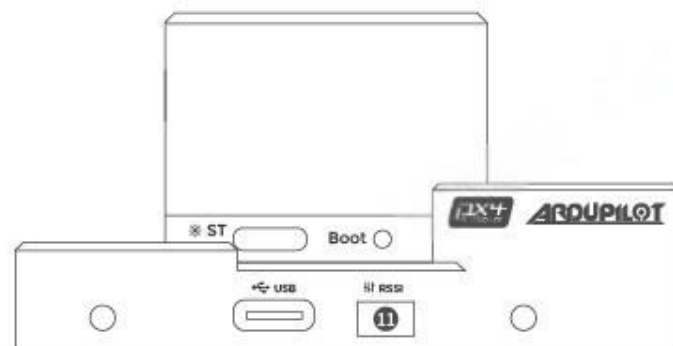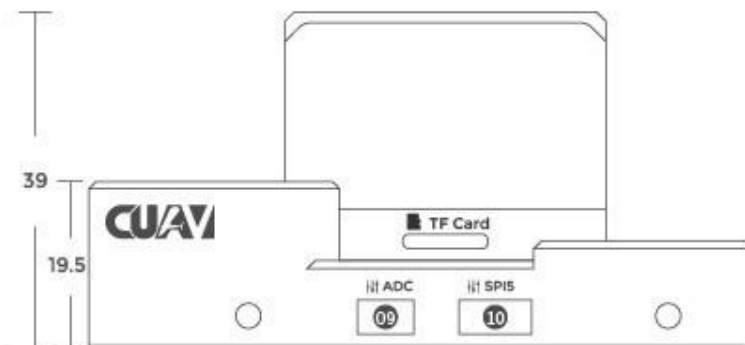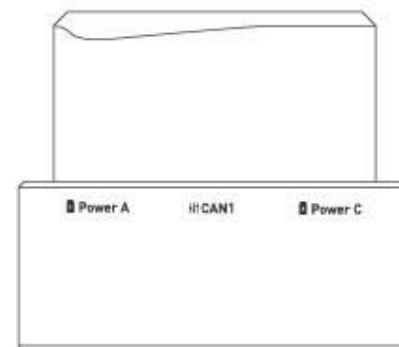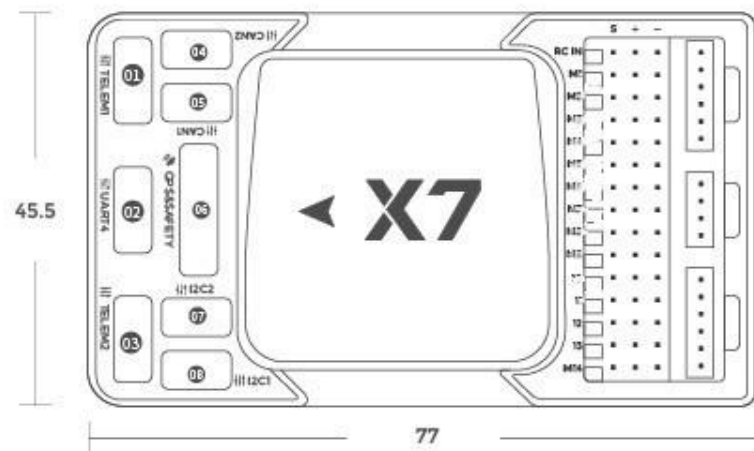

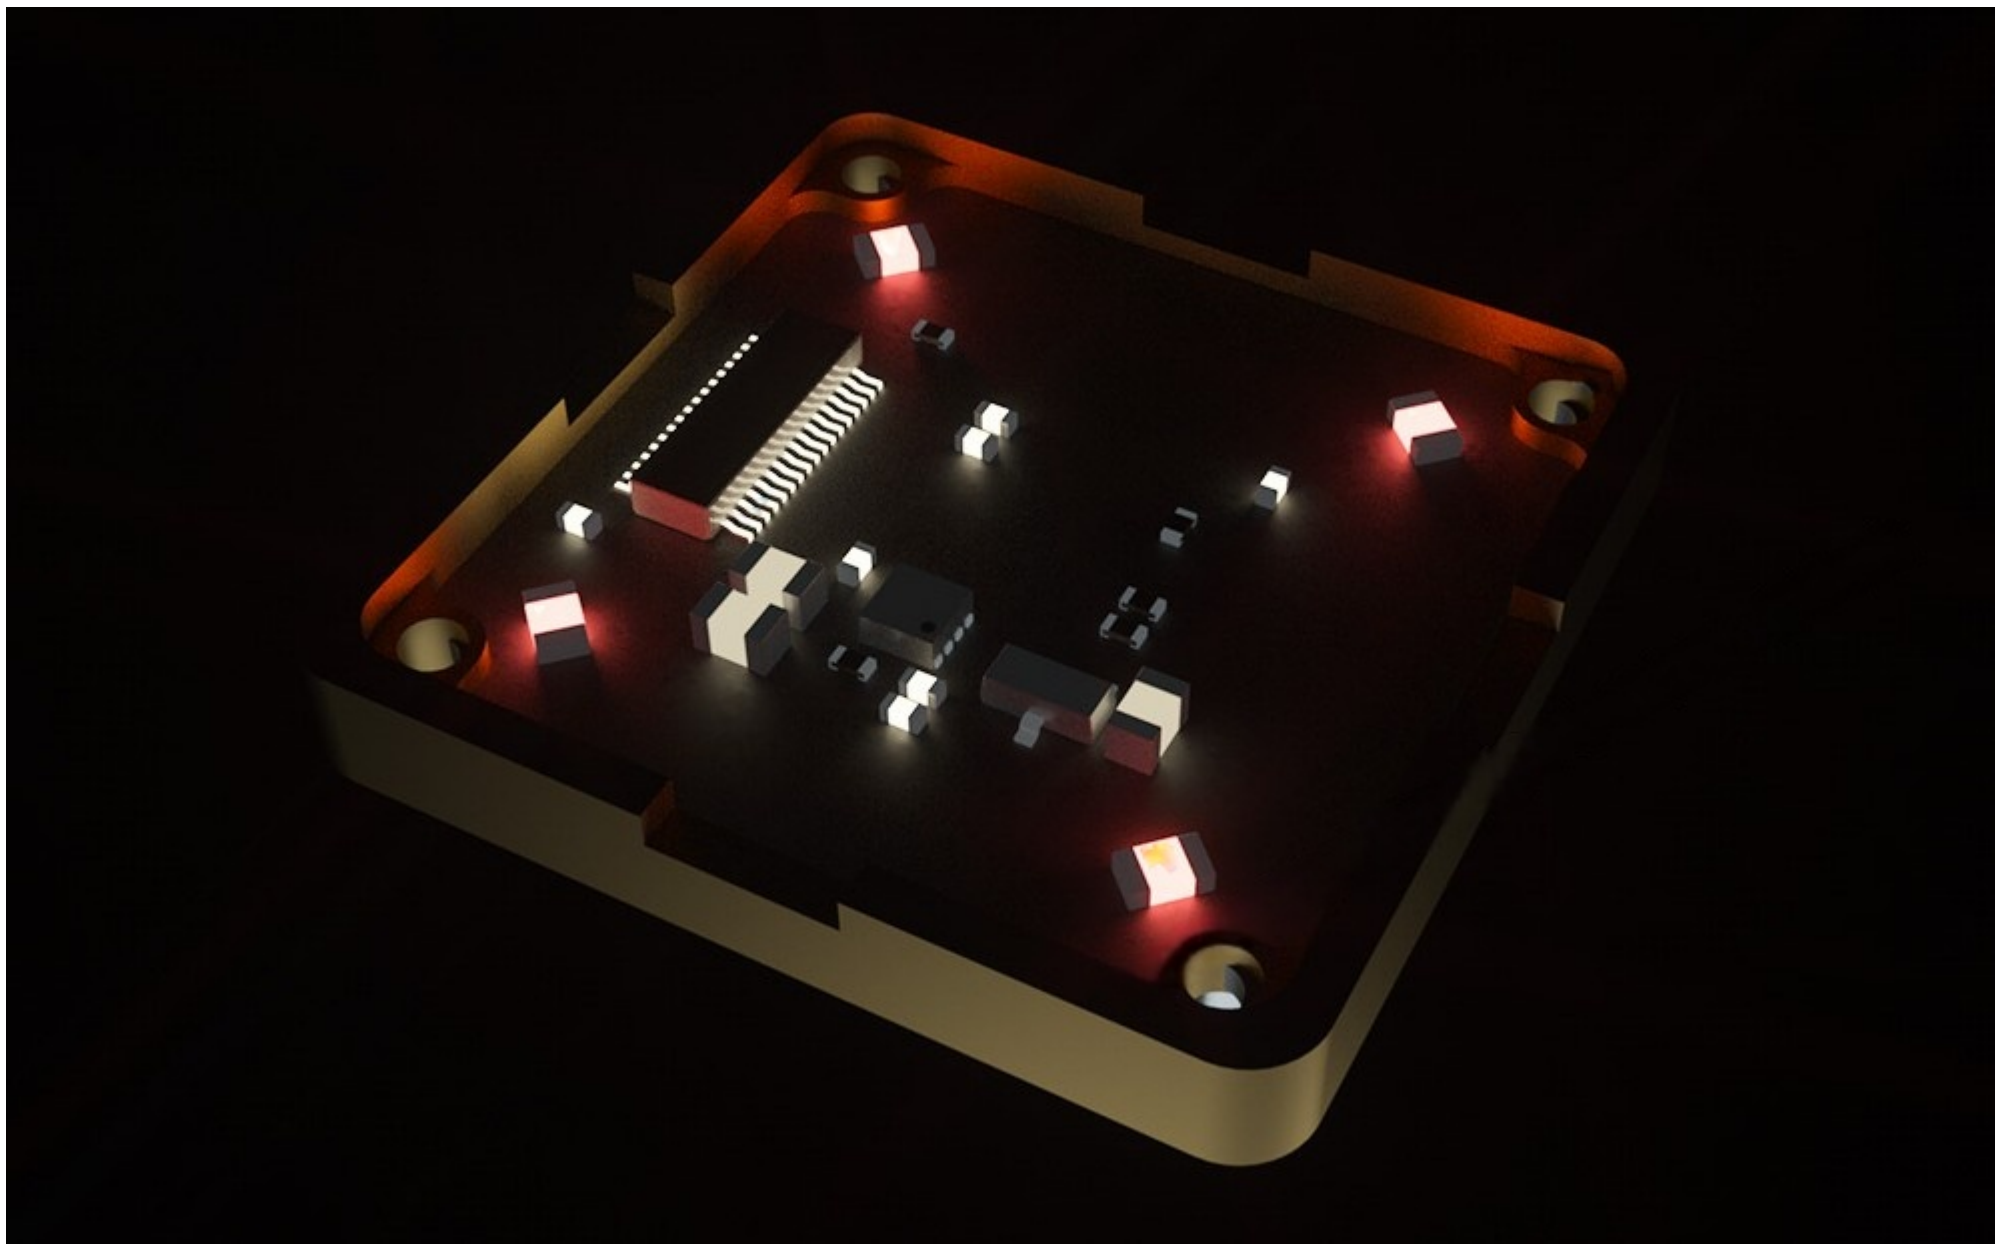


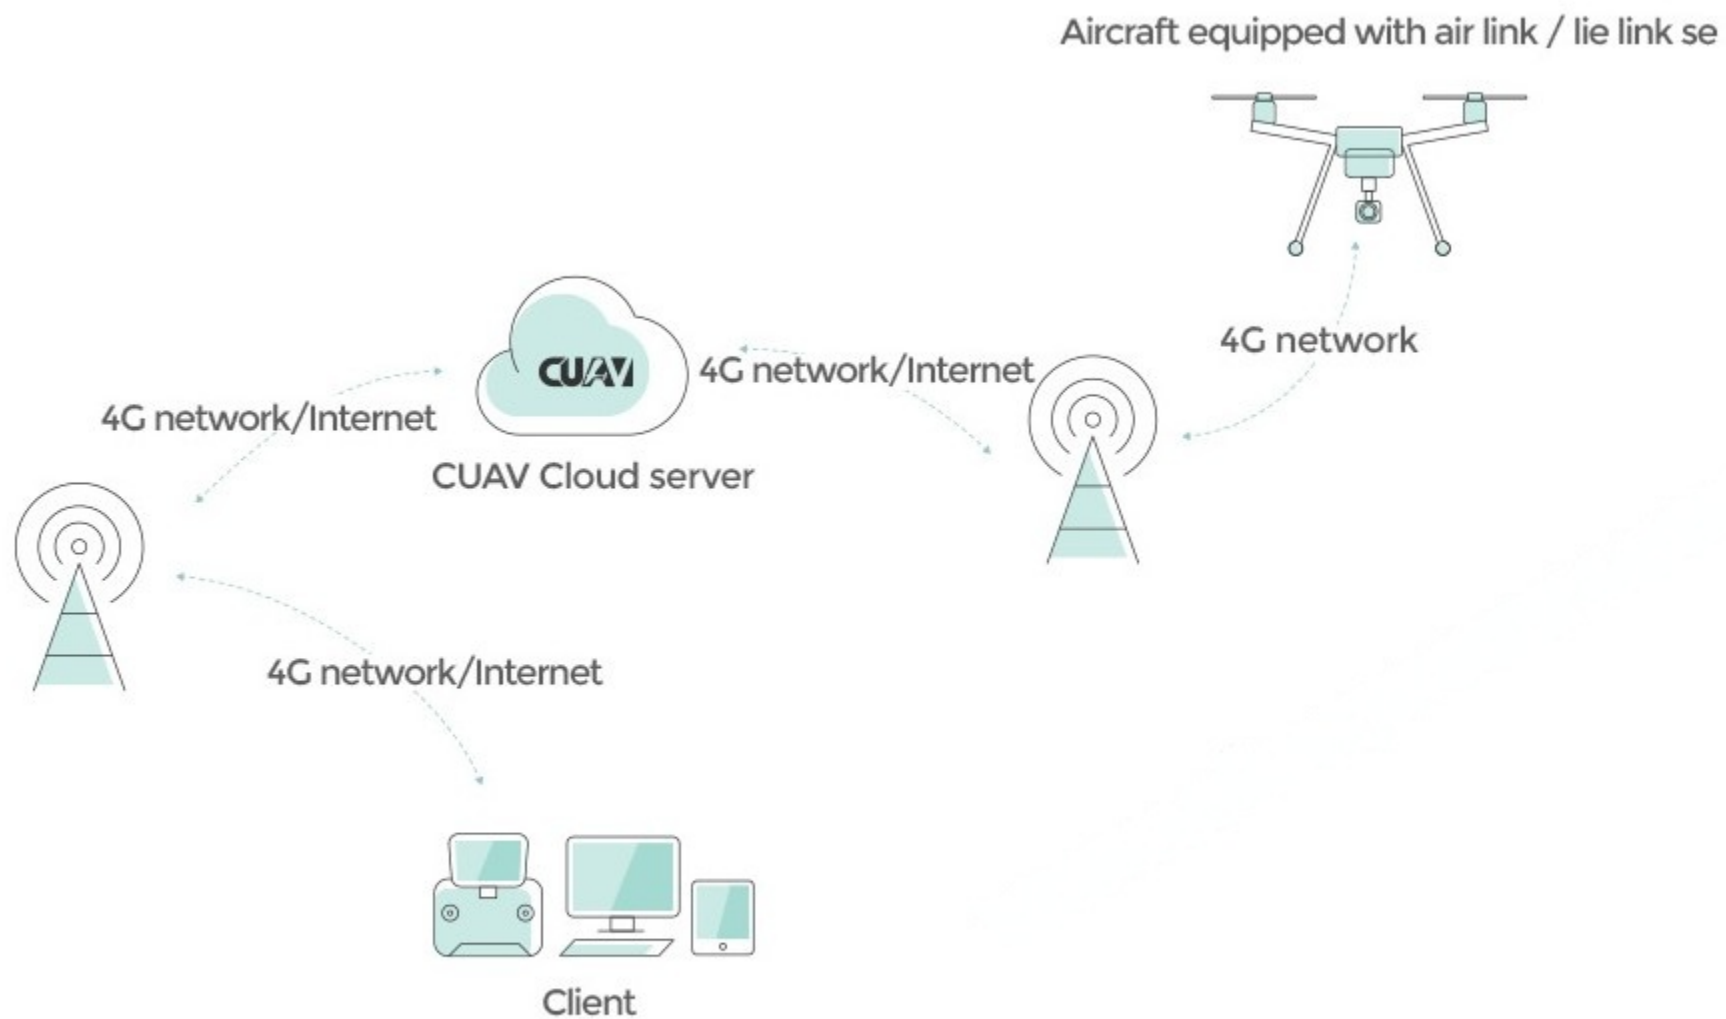

Working principle diagram of LTE Link series products

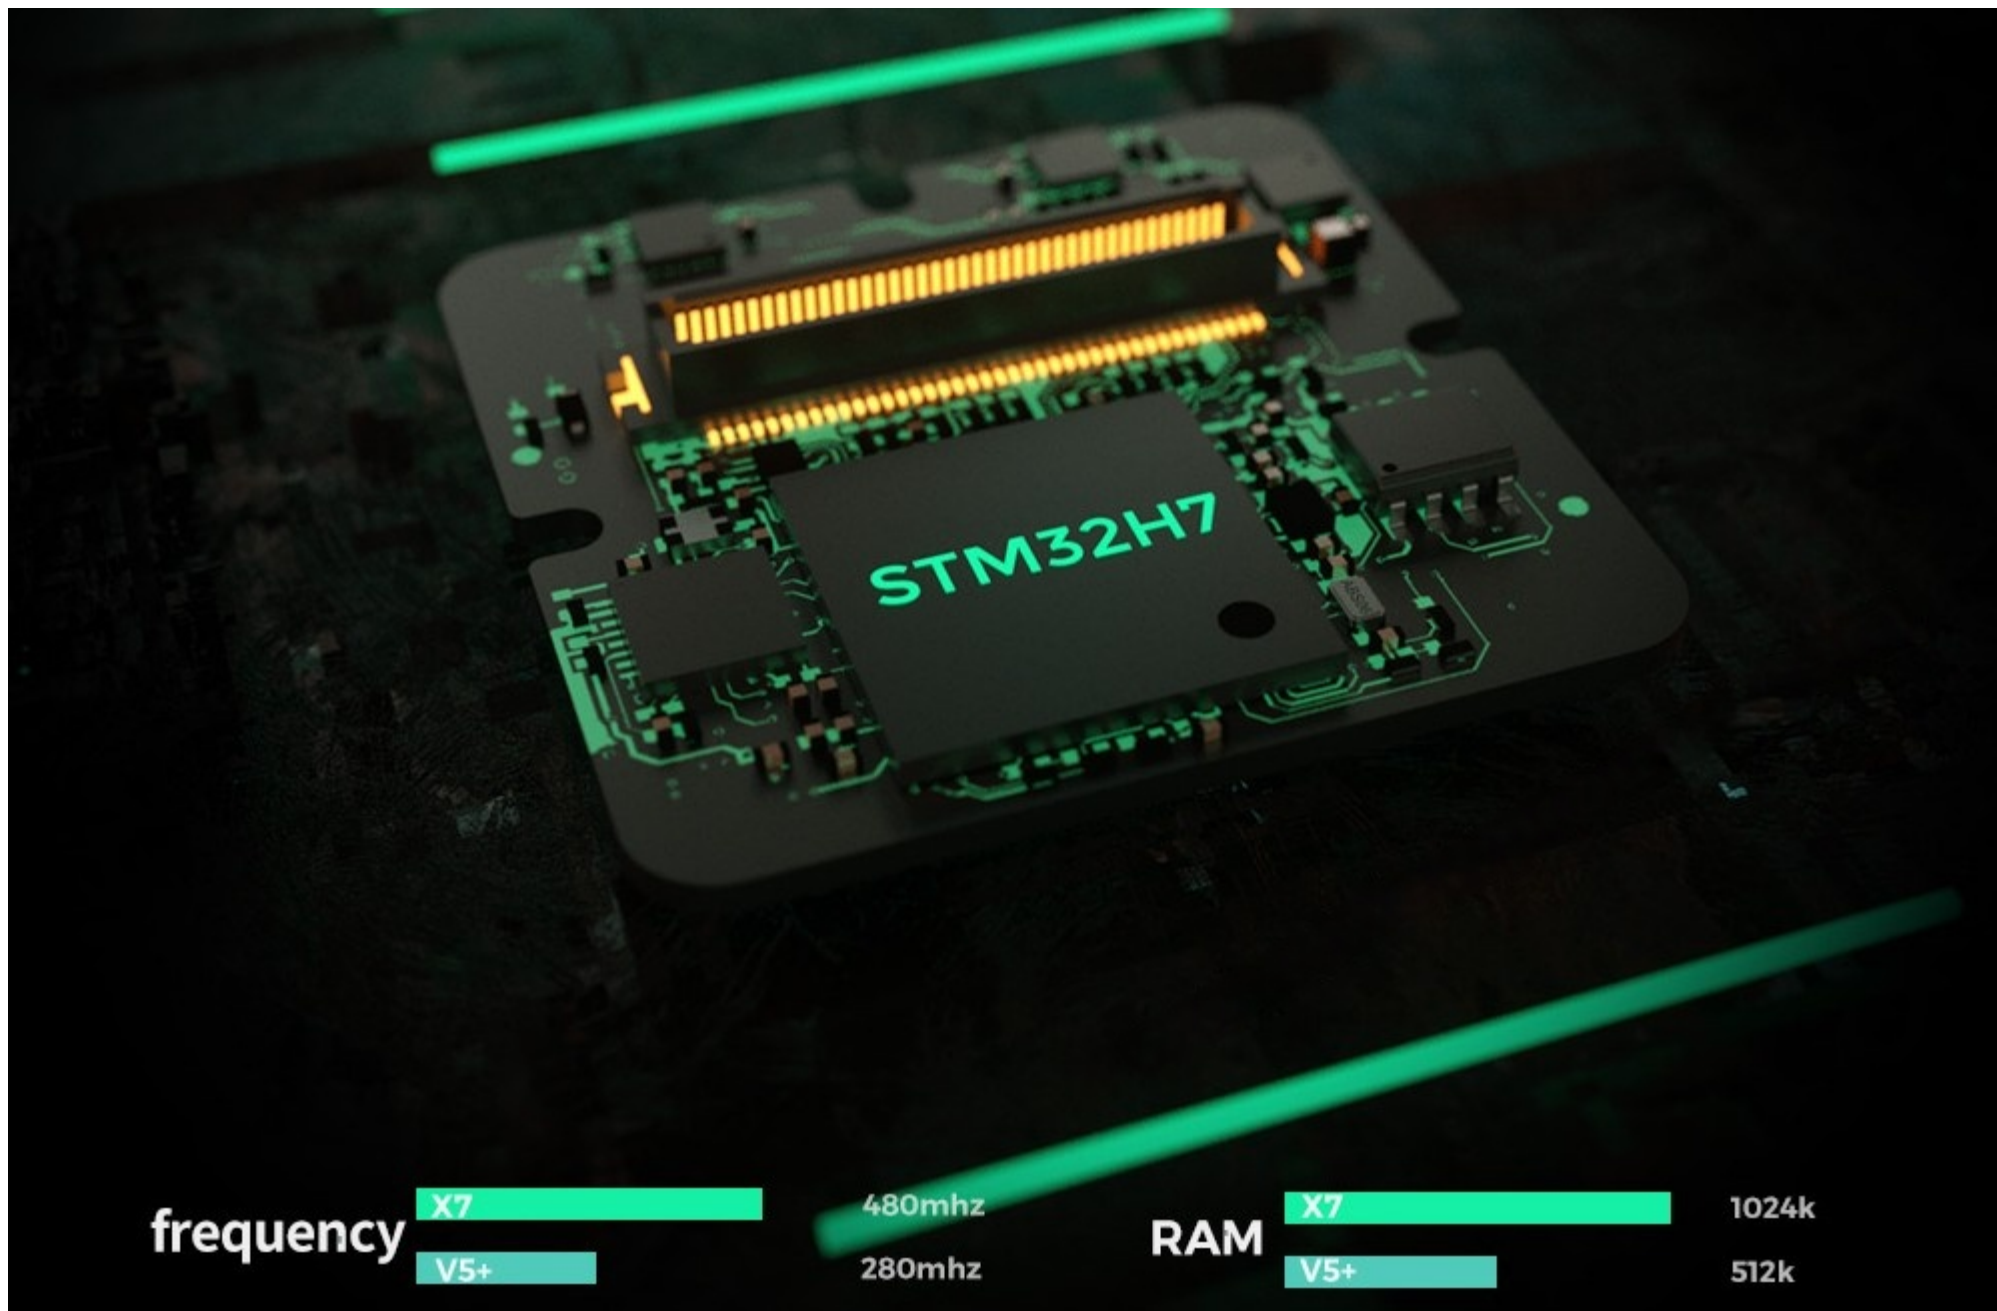



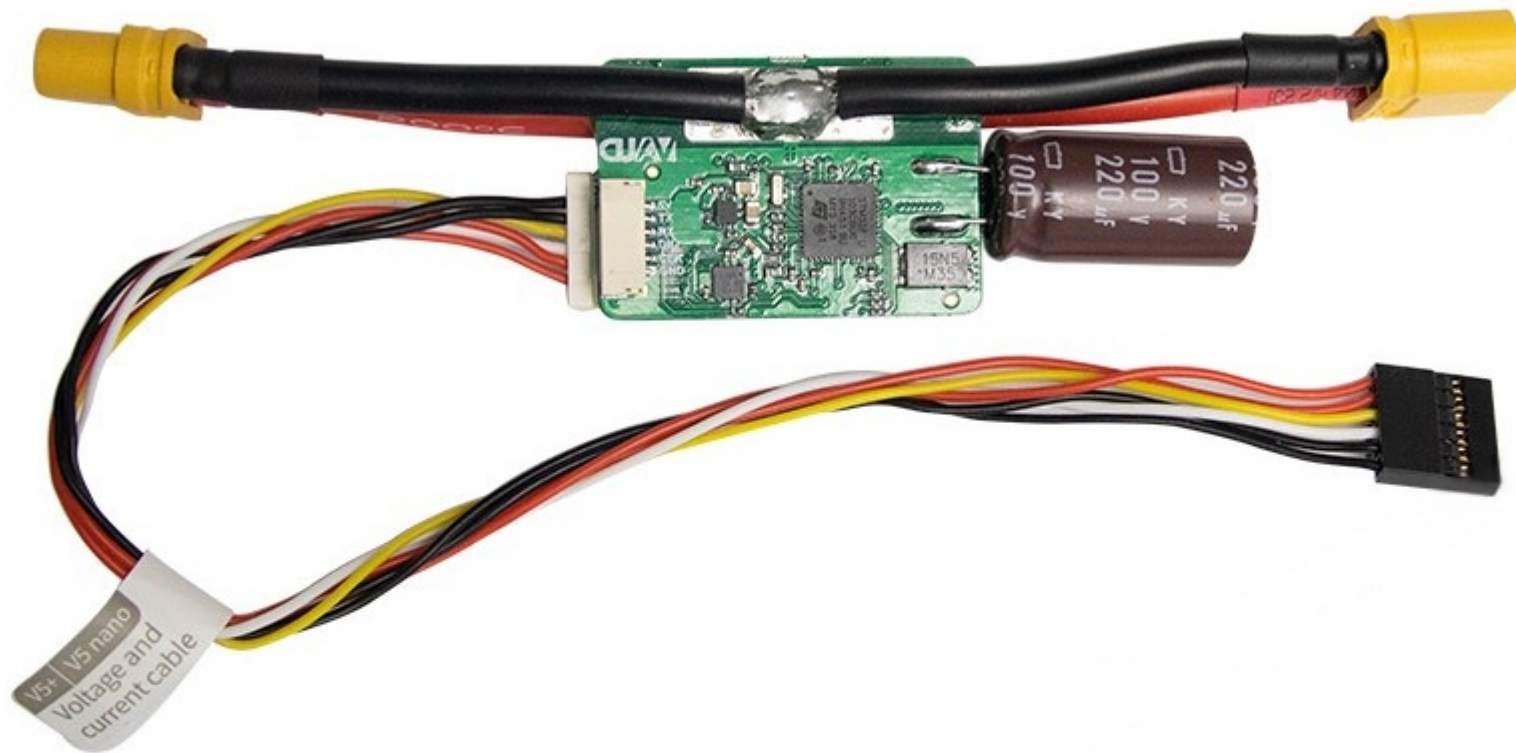

CAN PMU SE supports up to 60V / 80A input and measurement, voltage and current accuracy reaches $\pm 0.15\text{V}$ / 0.2A , and can choose higher precision CAN PMU

CONTACT CHINA MONEYPRO GROUP NOW:

EMAIL: SALES@MONEYPROUAV.COM

MOBILE: +86-18126437260 (WHAT'S UP) MS. AMY LUO