

Sensor redundancy State

ICM
20689

ICM
20649

BM1
088


480MHZ


MS
5611

RM
3100

Air speed
Fk

Fly mode
Stabilize

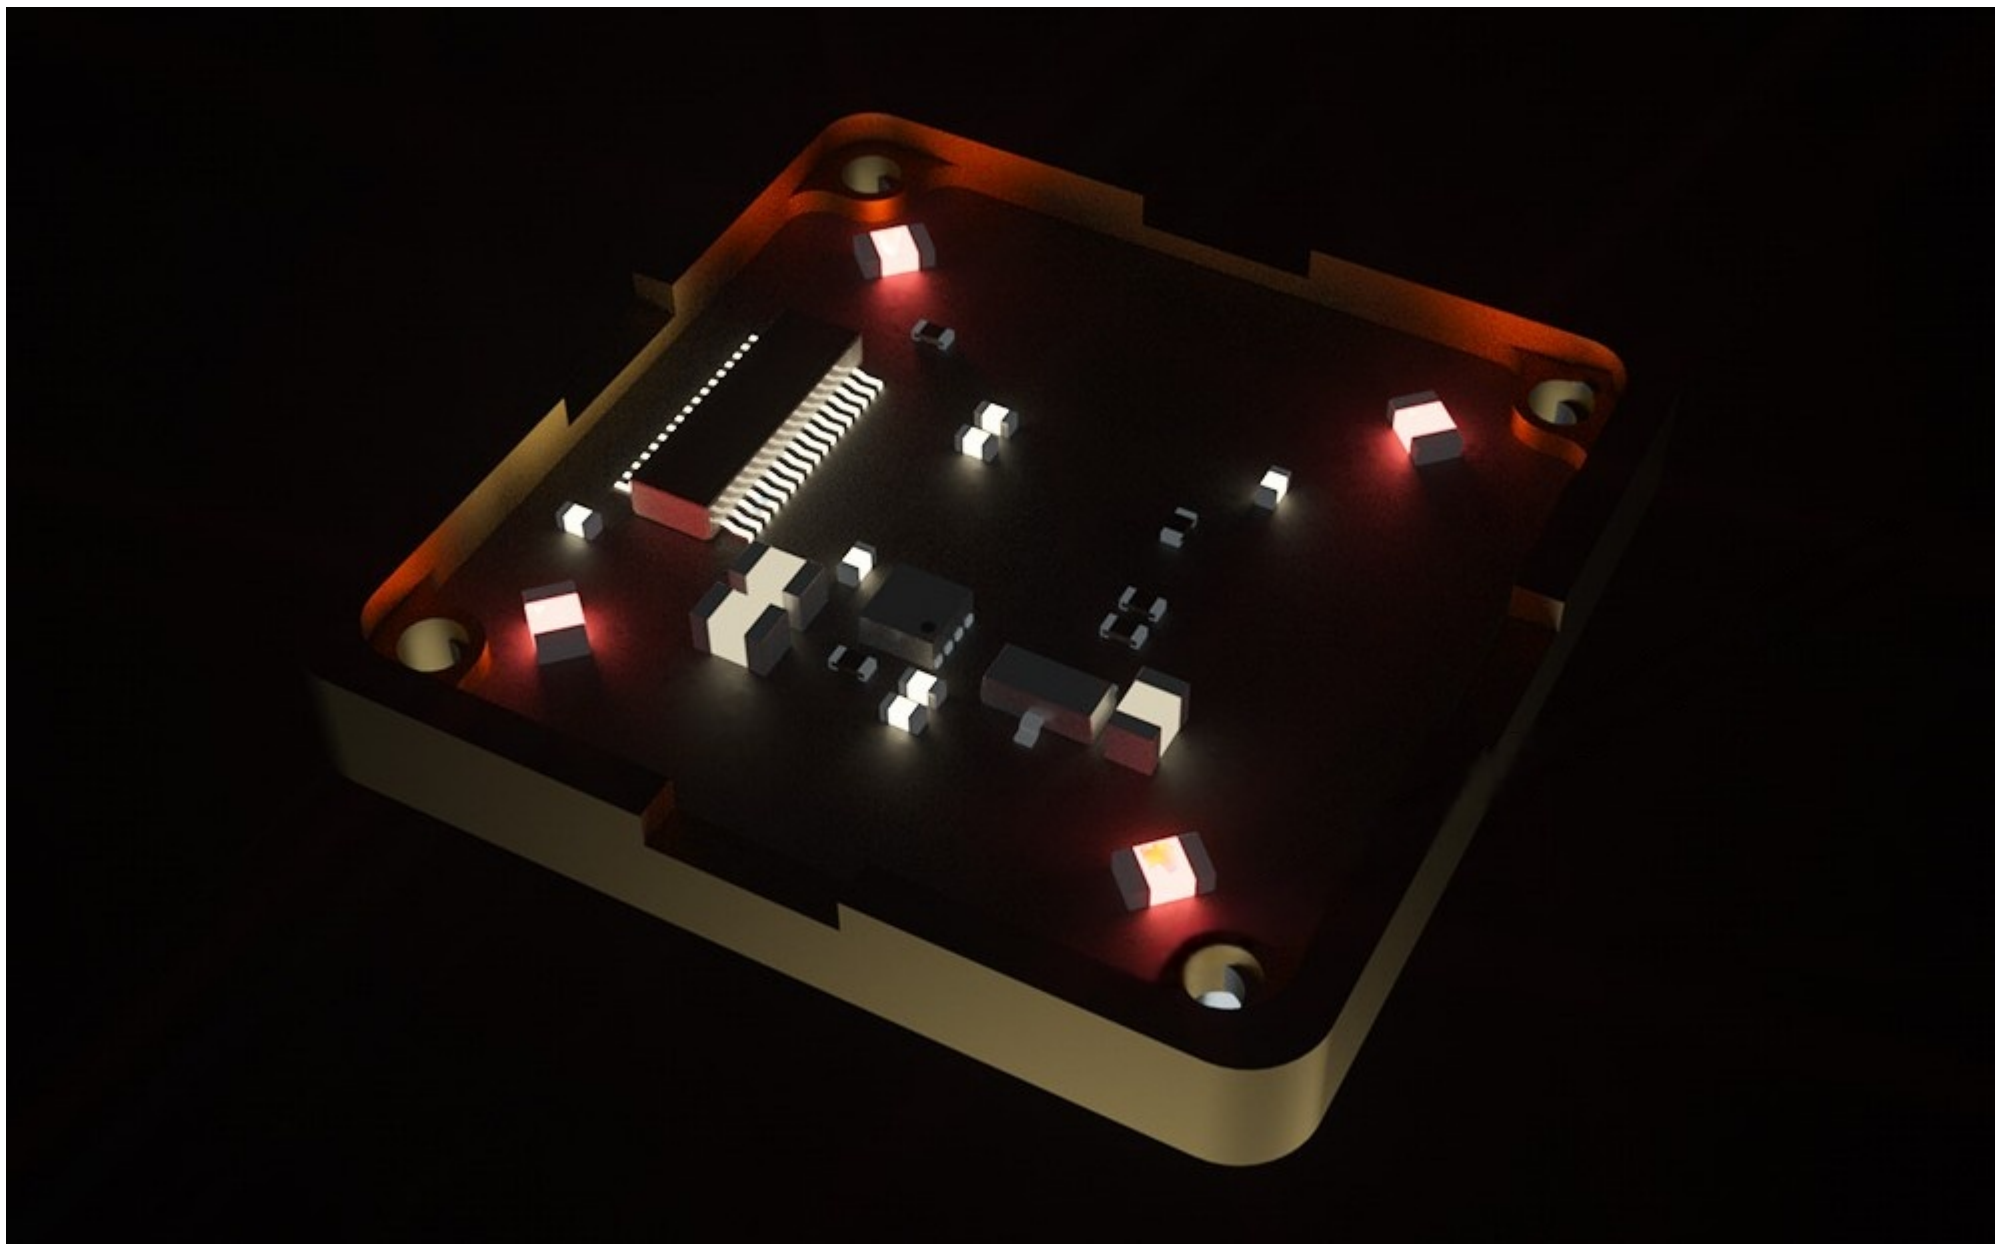

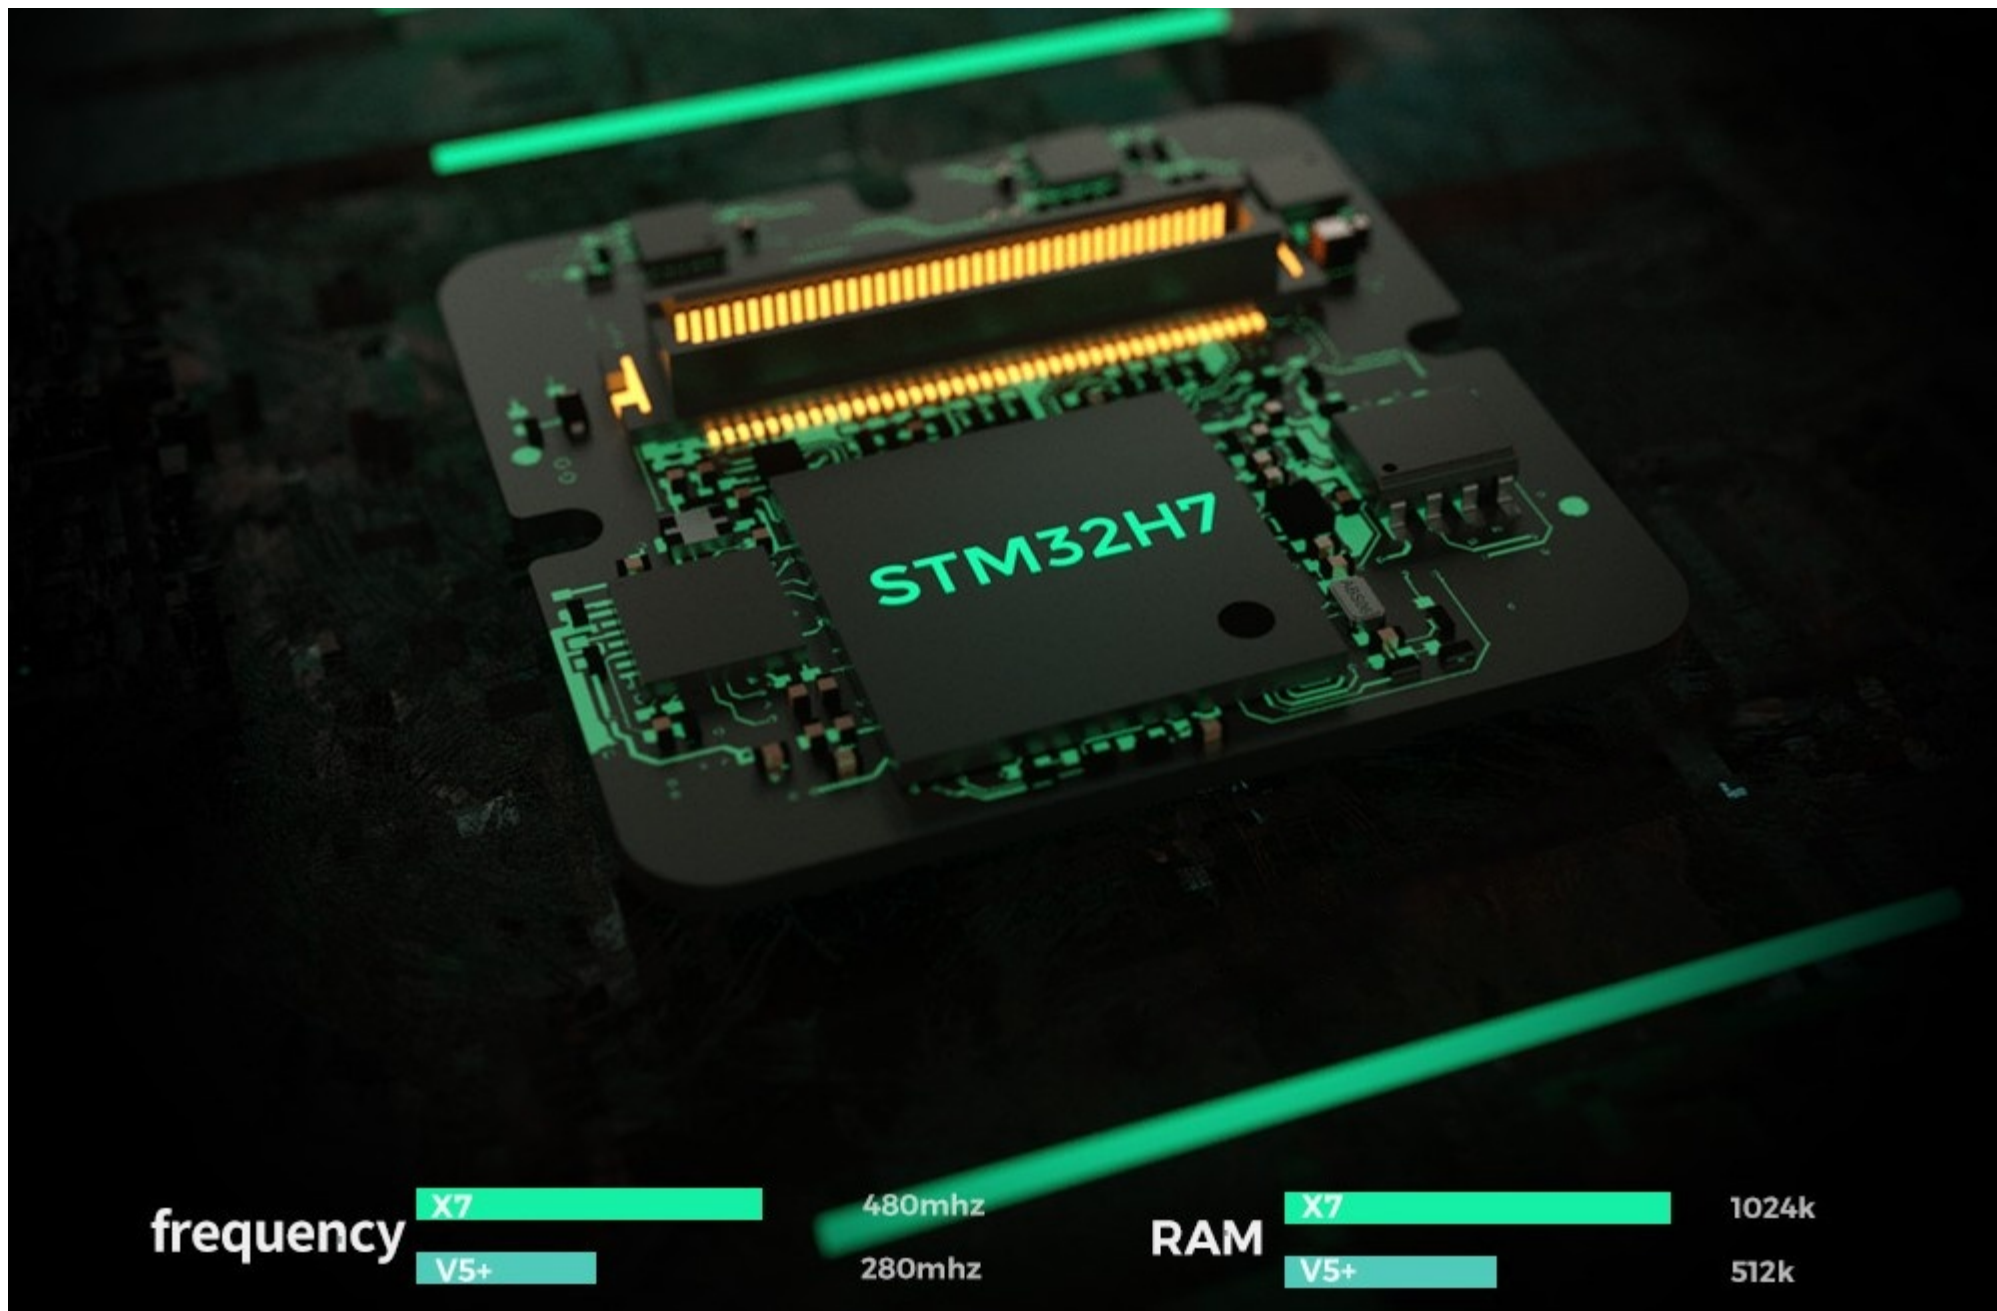

frequency


Model	Frequency
X7	480mhz
V5+	280mhz

480mhz
280mhz


RAM

Model	RAM
X7	1024k
V5+	512k

1024k
512k

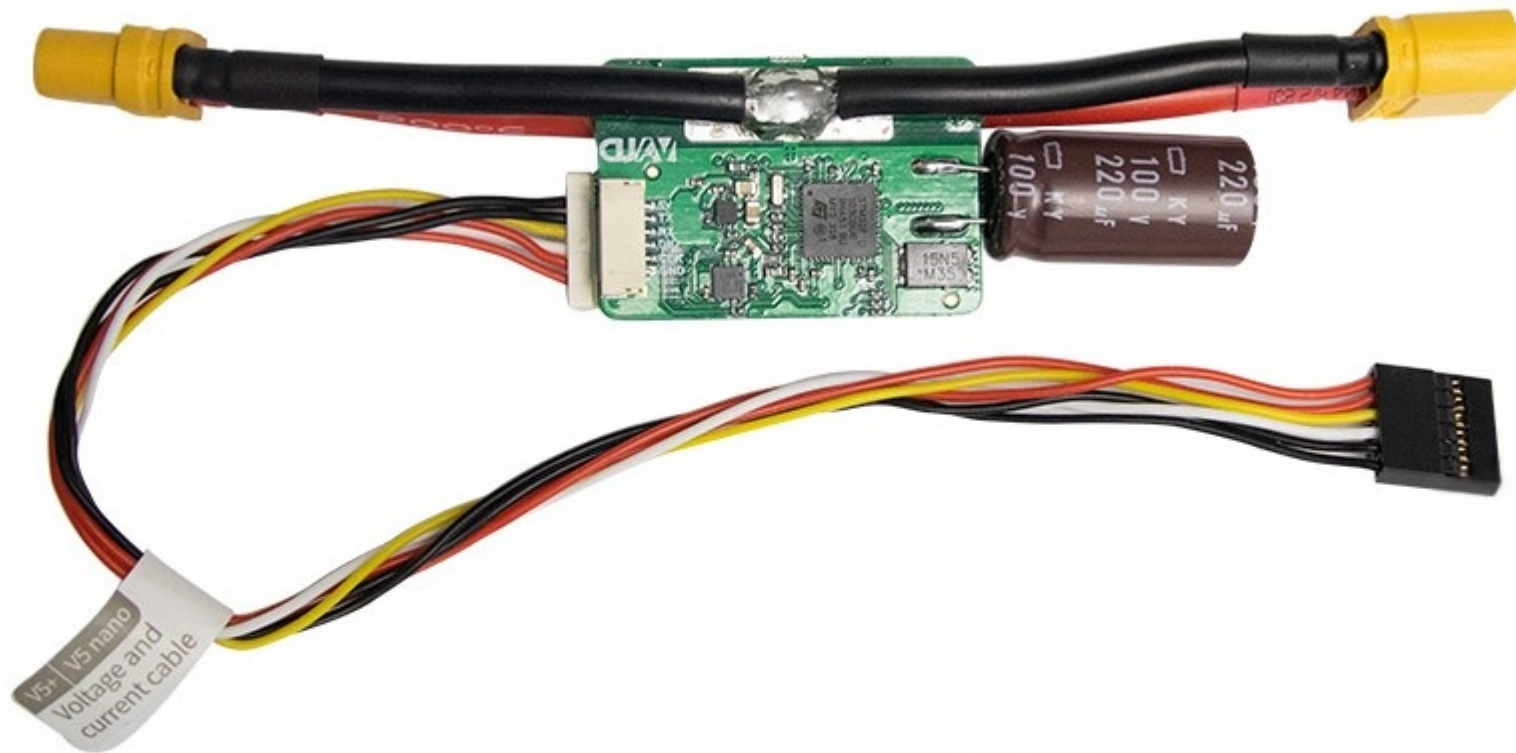

CAN PMU SE supports up to 60V / 80A input and measurement, voltage and current accuracy reaches $\pm 0.15\text{V}$ / 0.2A , and can choose higher precision CAN PMU

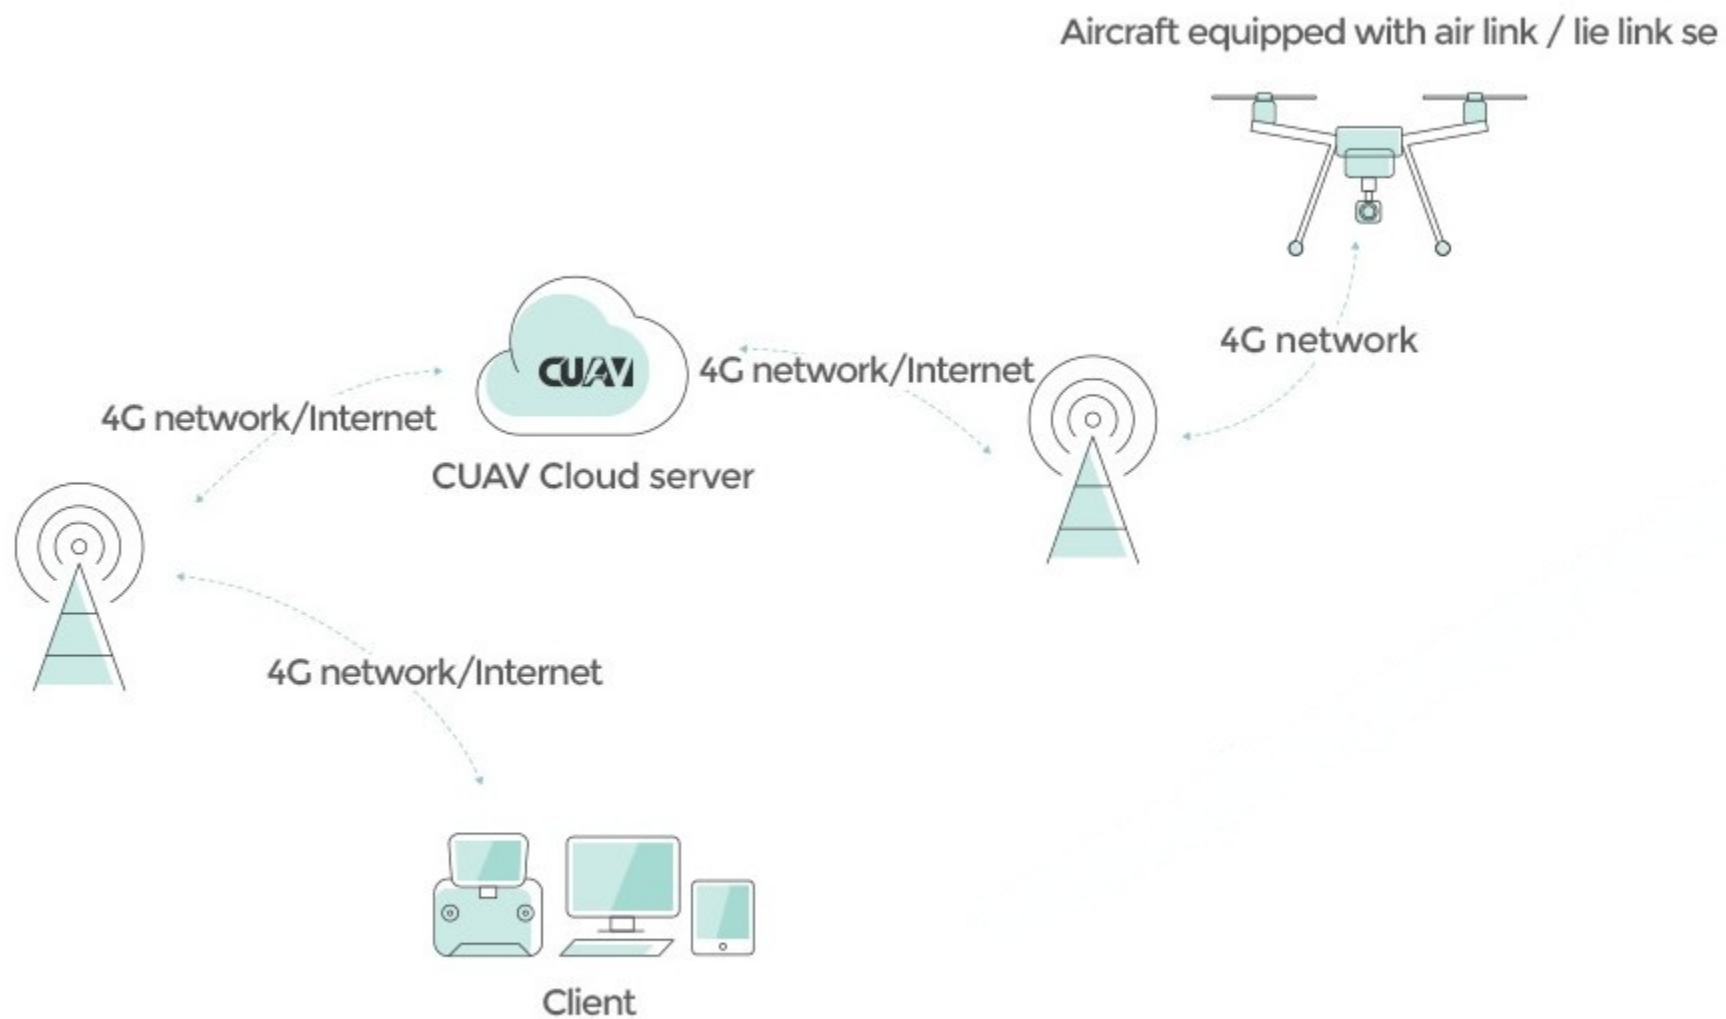

Working principle diagram of LTE Link series products

CONTACT CHINA MONEYPRO GROUP NOW:

EMAIL: SALES@MONEYPROUAV.COM

MOBILE: +86-18126437260 (WHAT'S UP) MS. AMY LUO